

190 mm
7.5 inch

12V DC	tipo connettore	codice - code	flusso aria	24V DC	tipo connettore	codice - code	flusso aria
	connector C-180908	GC1900012A	aspirante - suction		connector C-180908	GC1900024A	aspirante - suction
	connector C-180908	GC1900012S	soffiante - blowing		connector C-180908	GC1900024S	soffiante - blowing

Tensione di prova - Test voltage : 13 VOLT DC

pressione statica - static pressure		ASPIRANTE SUCTION			SOFFIANTE BLOWING		
mm H ₂ O	inch H ₂ O	Portata - Airflow m ³ /h cfm/h		Current Amp.	Portata - Airflow m ³ /h cfm/h		Current Amp.
0	0	730	431	7,5	625	369	6,3
2,5	0,1	680	401	7,4	580	342	6,4
5	0,2	620	366	6,9	552	326	6,6
7,5	0,3	550	325	7,2	530	313	6,6
10	0,4	480	283	7,3	509	300	6,9
12,5	0,5	450	266	7,4	450	266	7,1
15	0,6	425	251	7,6	374	221	7,3
17,5	0,7	385	227	7,8	310	183	7,4
20	0,8	335	198	8	271	160	7,6

Tensione di prova - Test voltage : 26 VOLT DC

pressione statica - static pressure		ASPIRANTE SUCTION			SOFFIANTE BLOWING		
mm H ₂ O	inch H ₂ O	Portata - Airflow m ³ /h cfm/h		Current Amp.	Portata - Airflow m ³ /h cfm/h		Current Amp.
0	0	740	437	3,5	642	379	3,2
2,5	0,1	680	401	3,5	605	357	3,3
5	0,2	630	372	3,5	565	333	3,3
7,5	0,3	550	325	3,3	529	312	3,3
10	0,4	470	277	3,2	506	299	3,3
12,5	0,5	430	254	3,2	449	265	3,3
15	0,6	395	233	3,3	368	217	3,2
17,5	0,7	355	209	3,4	313	185	3,3
20	0,8	310	183	3,4	259	153	3,4

Specifiche tecniche - Technical specification :

RUMOROSITA' CONTENUTA - LOW NOISE




Air flow: $1 \text{ m}^3/\text{h} = 0.59 \text{ cfm}$

Pressure loss: $1 \text{ mmH}_2\text{O} = 0.04 \text{ inch H}_2\text{O}$

$$1 \text{ mmH}_2\text{O} = 0.04 \text{ inch H}_2\text{O}$$

All dimensions are in mm (1mm = 0.0394 inch)

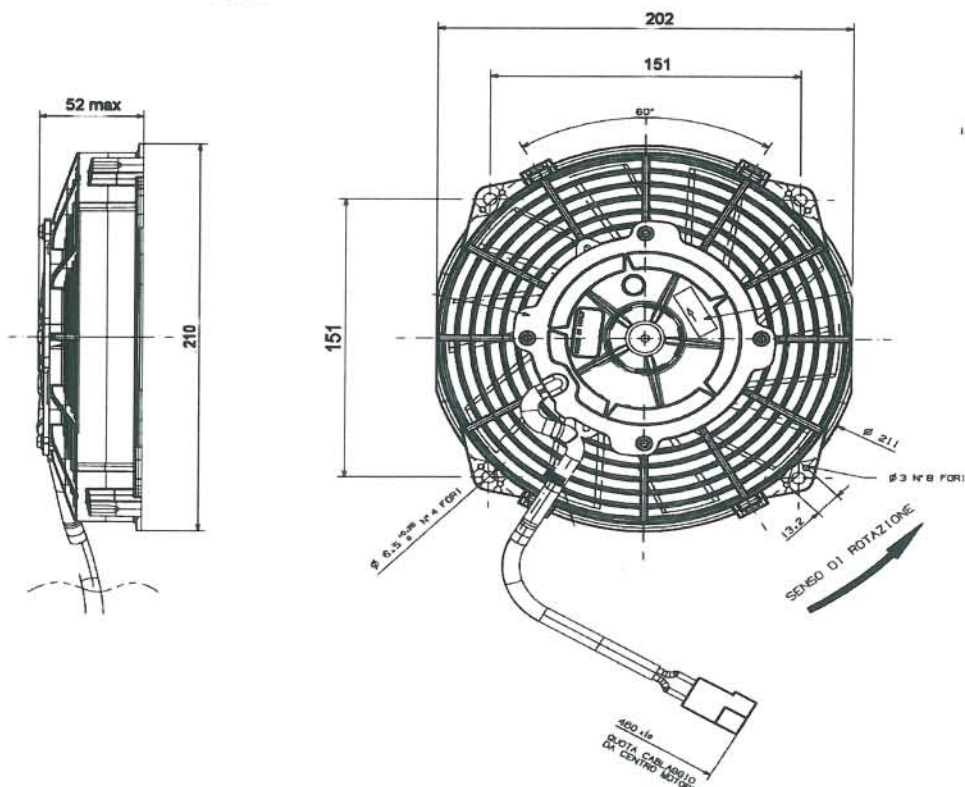

All dimensions present on this drawing are valid for all of the other part numbers listed in the table above
Le dimensioni indicate nel disegno sono da intendersi valide per tutti i codici elencati nella tabella soprastante