

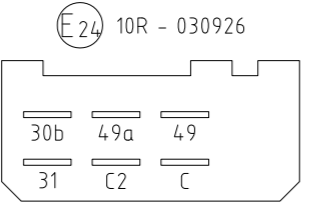
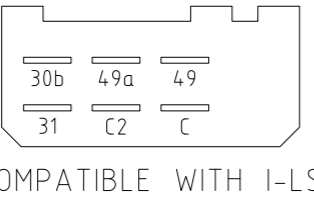
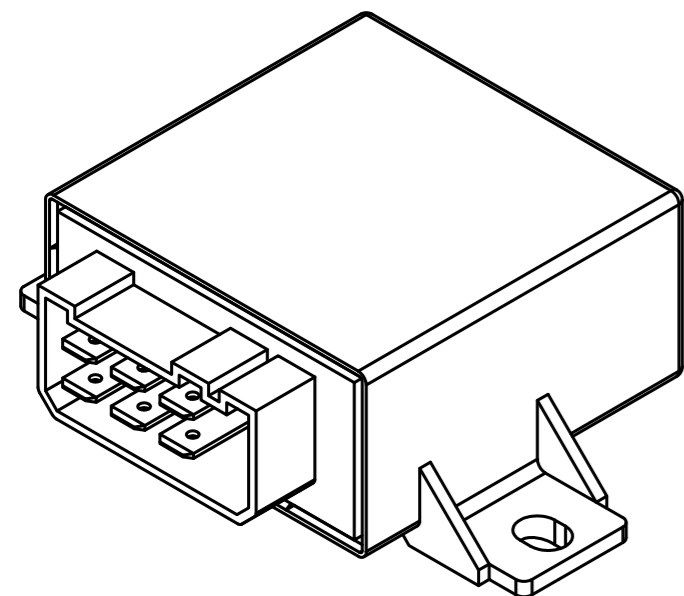
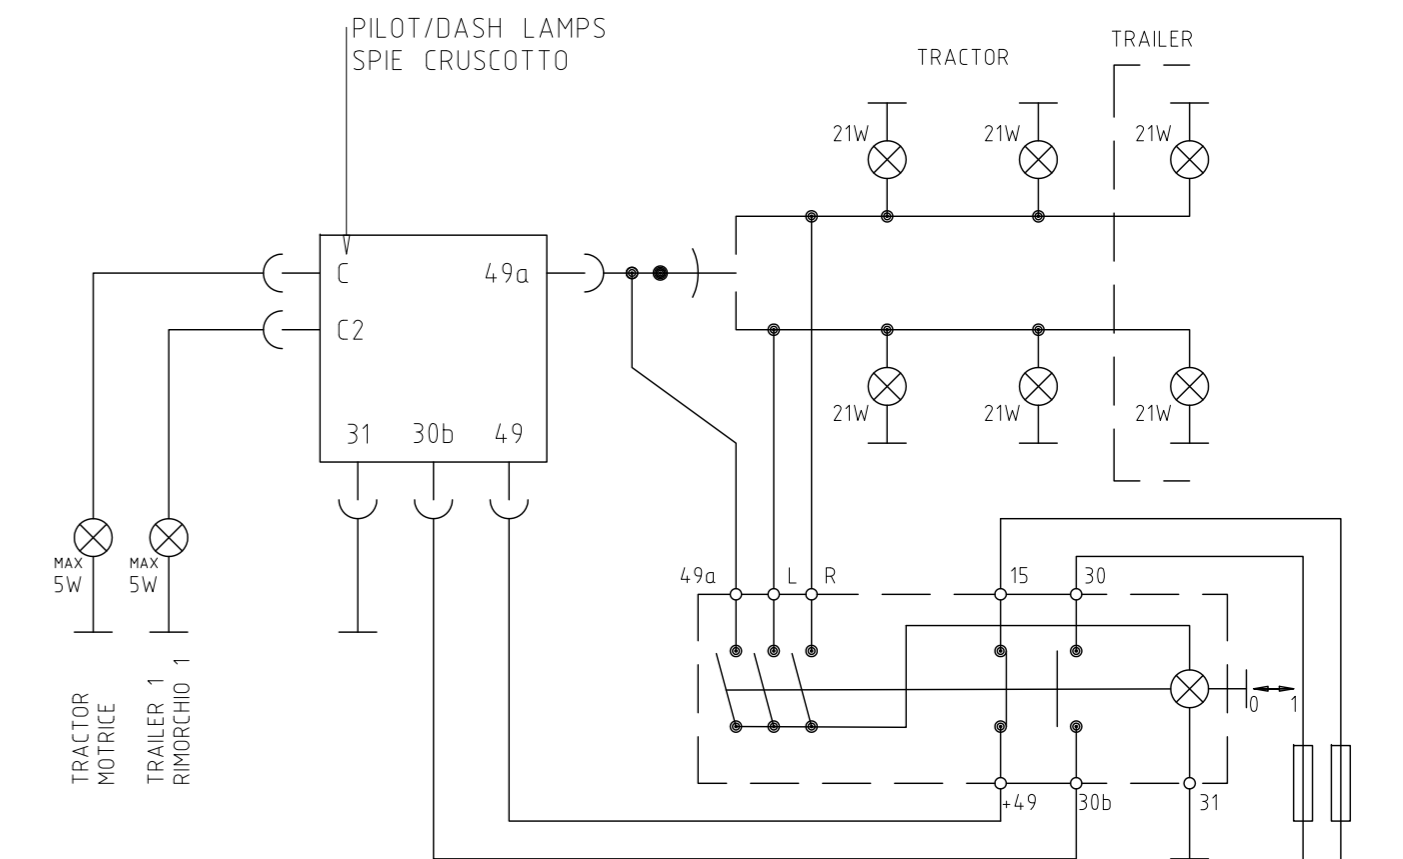
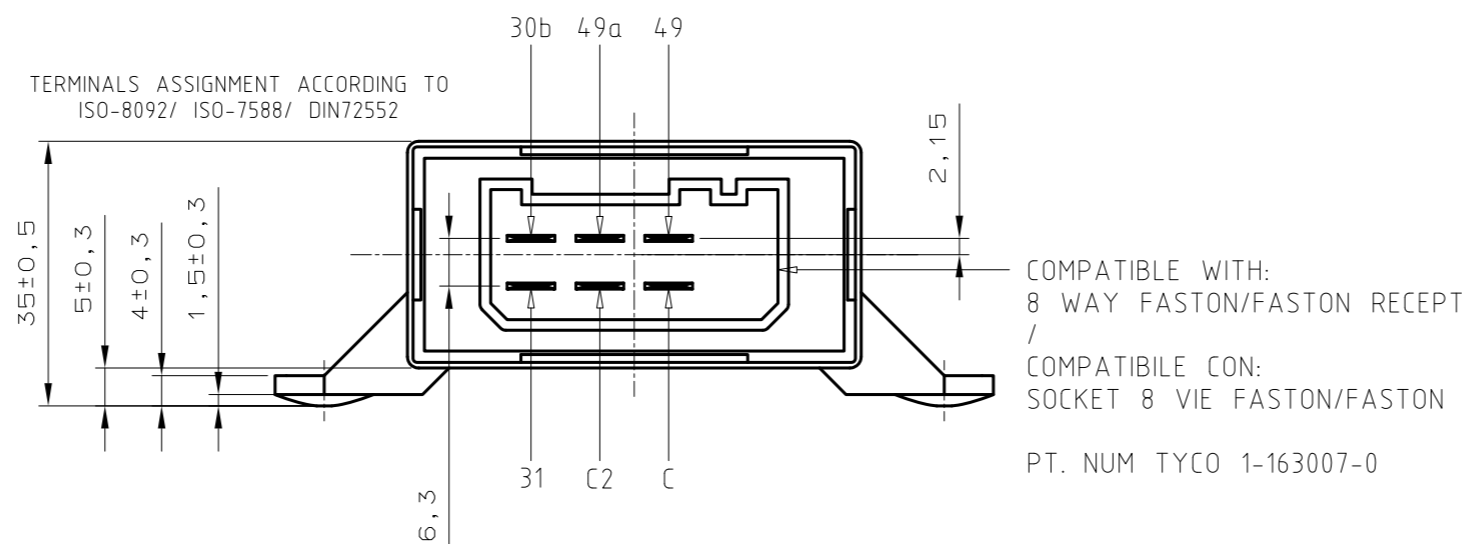


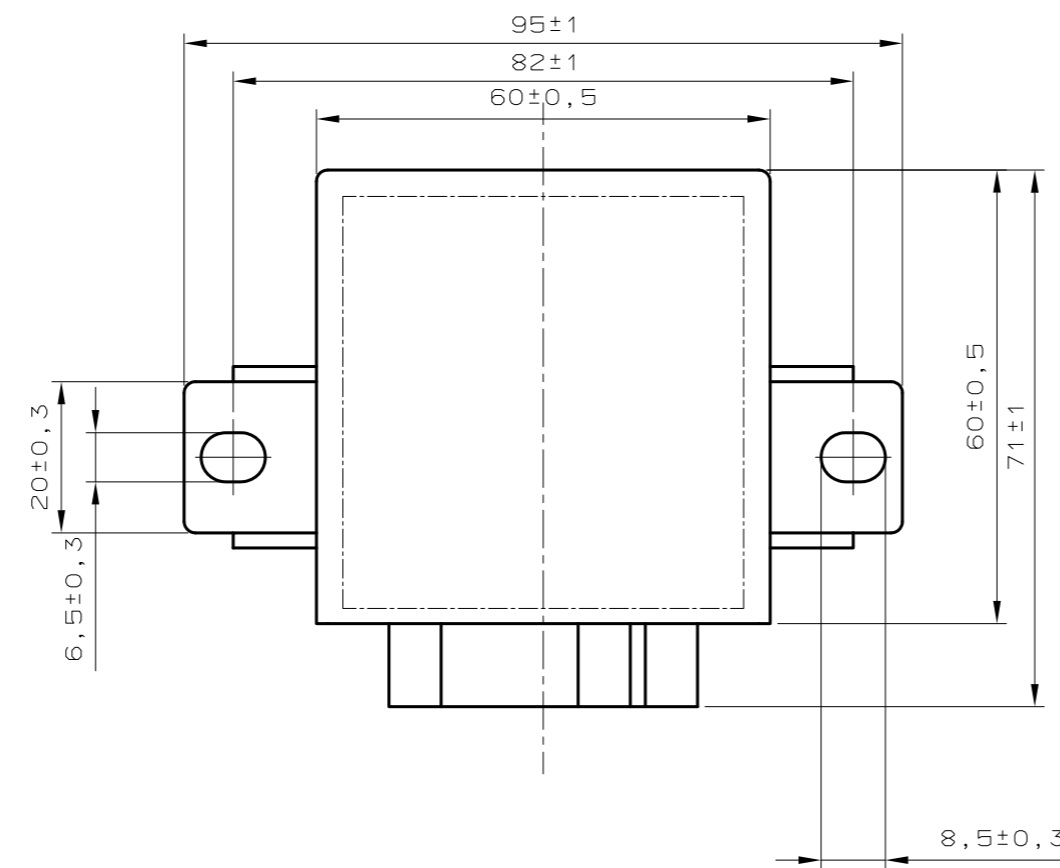

1	2	3	4	5	6	7	8	9	10	11	12
PART. NUMBER/ CODICE PRODOTTO	DESCRIPTION/ DESCRIZIONE	PRINTING/ SERIGRAFIA	<p style="text-align: center;"><b>COMPATIBLE WITH BOOSTER I-LS. TO ALLOW FAILURE DETECTION ON THE LATEST DIRECTION INDICATOR LIGHTS ADOPTING LED TECHNOLOGY</b></p> <p style="text-align: center;"><b>COMPATIBILE CON BOOSTER I-LS PER RILEVAZIONE GUASTO SU INDICATORI DI DIREZIONE CON TECNOLOGIA A LED</b></p>								
100.206.01.A1	FLASHER UNIT 6P 12V 2+1 X 21W W/DIAGNOSTIC - I-LS SUPPORT	<p>FLASHER UNIT 12V 2+1 (6) x 21W Made in Italy</p>  <p>COMPATIBLE WITH I-LS</p>									
100.206.02.A1	FLASHER UNIT 6P 24V 2+1 X 21W W/DIAGNOSTIC - I-LS SUPPORT	<p>FLASHER UNIT 24V 2+1 (6) x 21W Made in Italy</p>  <p>COMPATIBLE WITH I-LS</p>									

CHARACTERISTICS/ CARATTERISTICHE	100.206.01.A1	100.206.02.A1
RATED VOLTAGE TENSIONE NOMINALE	12V DC	24V DC
OPERATING VOLTAGE TENSIONE DI FUNZIONAMENTO	10V - 15V DC	20V - 30V DC
RATED LOAD CARICO NOMINALE	(2+1) x 21W	
RATED LOAD (HAZARD) CARICO NOMINALE (HAZARD)	6 x 21W	
OPERATING TEMPERATURE TEMPERATURA DI FUNZIONAMENTO	-40°C - +80°C	
RATED FLASHING FREQUENCY FREQUENZA DI LAMPEGGIO NOMINALE	80±10 FPM	
FLASHING FREQUENCY UNDER FAILURE FREQUENZA DI LAMPEGGIO DURANTE GUASTO	140±20 FPM	
ELECTRICAL LIFETIME DURATA ELETTRICA	TESTED FOR 200 HOURS AT RATED LOAD 15 SEC.ON/ 15 SEC.OFF AT 12VDC/ 24VDC TESTED 36 HOURS CONTINUOUS AT 8x21W	
MECHANICAL LIFETIME DURATA MECCANICA	1.000.000 OPERATIONS	
SUPPORTED LAMPS LAMPADIE SUPPORTATE	21W FILAMENT BULBS/ CLUSTER LED WITH I-LS	
IN CONFORMITY WITH IN CONFORMITA' CON	ECE R48 / ECE R10 (e24) / ISO 13207-1	
IP	IP 54	
INDICE PROTEZIONE		

MATERIALS/ MATERIALI	
BASE BASETTA	PA 6,6 + 30% GLASS FIBER BLACK
HOUSING COPERCIO	PA 6,6 + 30% GLASS FIBER BLACK
TERMINALS TERMINALI	Cu Zn Sn

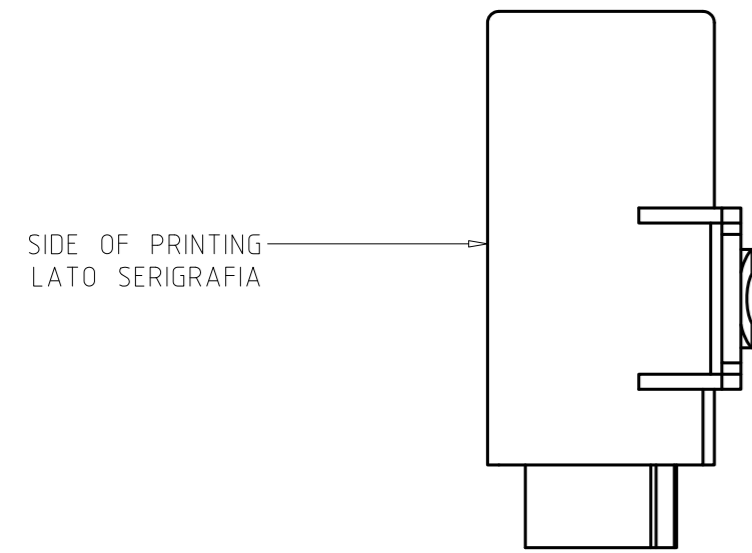

FAILURE DETECTION / DIAGNOSTICA GUASTO	
FAILURE OF 1 LAMP GUASTO DI 1 LUCE	C2 PILOT LAMP OFF
FAILURE OF 2 LAMPS GUASTO DI 2 LUCI	C2 PILOT LAMP OFF/ FLASHING FREQUENCY INCREASE TO 140±20 FPM

		SCALE/SCALA:	MATERIALS/MATERIALI:
		1:1	SEE "MATERIALS"
DRAWN/DISEGNATO:	M. NARDI	DATE/DATA:	TREATMENTS/TRATTAMENTI:
	03-06-14		SEE "MATERIALS"
<small>mm DIMENSIONS / DIMENSIONI IN mm GENERAL TOLERANCE FOR LINEAR AND ANGULAR DIMENSIONS ACCORDING TO ISO 2768</small>	CHECKED/CONTROLLATO:	DATE/DATA:	INDX/ESP:
	M. TESSARO	03-06-14	0
DESIGNATION/DENOMINAZIONE:		PART NUMBER/ DISEGNO NUMERO:	
FLASHER UNIT 6P 2+1		100.206.XX.A1	
<small>BY TERMS OF LAW IS STRICTLY FORBIDDEN TO COPY OR TO COMMUNICATE TO THIRD THE CONTENT OF THIS DRAWING A TERMINI DI LEGGE E' RIGOROSAMENTE VIETATO RIPRODURRE O COMUNICARE A TERZI IL CONTENUTO DEL PRESENTE DISEGNO.</small>			SIZE/FORMATO: A3 SHEET/FOGLIO: 1/1

MODIFICATION DESCRIPTION/ DESCRIZIONE DELLA MODIFICA

DATE/ DATA

INDEX/ ESP

CAD