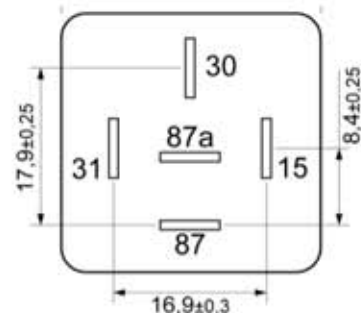
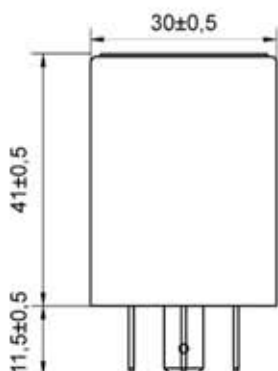



SI0183



Description – Descrizione

MULTITIMER ADJUSTABLE DEVICE 12/24V**Outline Dimensions – Dimensioni Esterne**

Pin Configuration - Pinatura

Wiring Diagram – Schema Circuito**Features - Caratteristiche**

/12	/24
RATED VOLTAGE	RATED VOLTAGE
12V	24V
AMPERAGE	AMPERAGE
10A	10A

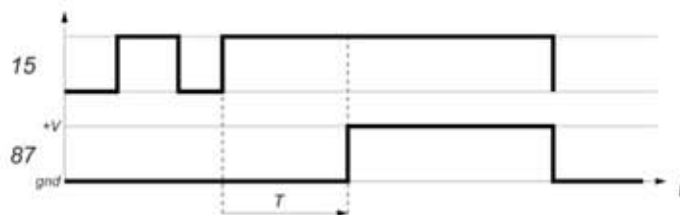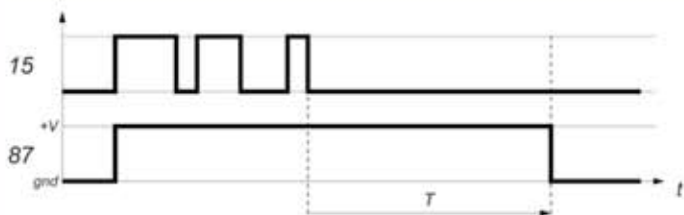Delay OFF**Delay ON**

0	0,5 ... 10s Delay OFF	5	0,5 ... 6h Delay ON
1	5 ... 60s Delay OFF	6	5 ... 60min Delay ON
2	0,5 ... 10min Delay OFF	7	0,5 ... 10min Delay ON
3	5 ... 60min Delay OFF	8	5 ... 60s Delay ON
4	0,5 ... 6h Delay OFF	9	0,5 ... 10s Delay ON

This is a multimer relay with delay OFF and delay ON feature. The delay is not pre-determined and adjustable by the final user.

È un multimer relay con funzione delay OFF e delay ON. Il ritardo è variabile e programmabile direttamente dall'utente finale.

Materials – Materiali

Baseplate – Basetta	Nylon PA 6,6 + 30% Glass fibre Black	Terminals – Terminali	Cu Zn (6,3X0,8mm)
Cap - Coperchio	Nylon PA 6,6 + 15% Glass fibre Black		

Additional Data – Informazioni aggiuntive

In conformity with:	ISO 7588 – DIN 46244 – ISO 8092	EU Dir. 2002/95/EC RoHS	DIN 40050: IP 5K4 Terminals pointing downwards
In conformità con:	UNI EN ISO 9001-2008	DIR. 95/54 CE REG. 10 ECE-ONU/02	EMC DIN 40839